



ACOSGRAF

FÁBRICA DE MÁQUINAS GRÁFICAS, LDA.

www.acosgraf.com



LUXDRYER HALOGEN



www.acosgraf.com


The LUXDRYER HALOGEN is a machine suitable to expose screen printing screens. The machine is equipped with special design halogen light source lamp for a faster screen exposure and maximum detail. The LUXDRYER HALOGEN is a fully automatic machine with a pressure meter for the vacuum installed as a standard to prevent (accidental opening from screens. It can also be equipped with instant halogen light source lamps

Note: All technical details can be modify without notice



ACOSGRAF
FÁBRICA DE MÁQUINAS GRÁFICAS, LDA.

Rua do Castalhão - Canelas (Zona Industrial da Mina), nº320 4410 - 269
Canelas VNG - Portugal P.O.Box - 45 -4408 VALADARES CODEX - Portugal
Tel. +351 227 621 679 / +351 227 621 901 - Fax +351 227 623 375
www.acosgraf.com | export@acosgraf.com

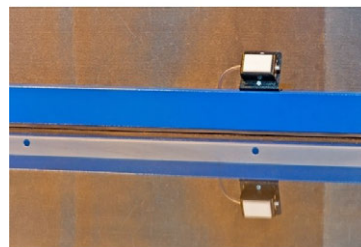

PRODUCT DESCRIPTION

- Halogen light source for fast and perfect screen expoure;
- Possibility to equip exposure unit with instant halogen light source (no need to pre heat or be in standby mode);
- LCD control panel;
- Equipped as standard with photocell from light intensity measure to make automatic compensation from exposure times;
- Capable to save up to 10 different programs;
- Exposure times controlled by a digital counter;
- Fully automatic operation for vacuum and exposure;
- Perfect and quiet vacuum;
- Digital temperature control for drying cabinet;
- Working temperature for drying cabinet - 15 to 50 degrees;
- Drawers running smoothly in ball-bearing slides with end stop;
- Drying cabinet with forced ventilation;
- Yellow light to prepare the job;
- Emulsion hardener program available as standard.

LUXDRYER HALOGEN	Units	LUX HAL 0608	LUX HAL 0811	LUX HAL 1010	LUX HAL 1012	LUX HAL 1416
Maximum screen size	cm	60x80	80x110	100 x100	100x125	140x160
Power from halogen light source	W	3000 RAPID	3000 RAPID	5000 RAPID	5000 RAPID	5000 RAPID
External depth	cm	150	115	135	147	187
External width	Cm	135	147	155	172	212
External height	Cm	250	250	250	250	250
Power install	Kw	5500	5500	5500	8500	8500
Weight	Kg	210	538	260	350	400
Voltage	V	3x400	3x400	3x400	3x400	3x400

Note: All technical details can be modify without notice